



WEAR PROTECTION

The hydraulic pump is the heart of your hydraulic system. Any wear can reduce efficiency and system service life. The Shell Tellus® range of hydraulic fluids offers a range of options, including the latest synthetic, ashless technology that can help to extend pump life, even under the most severe conditions, and is cost effective with zinc-based additive technology for general use.

OIL LIFE

The longer the oil life, the less fluid maintenance is required to help your equipment operate for longer without interruption. The Shell Tellus® range of hydraulic fluids enables you to match the oil life of the fluid to your operational needs. It includes extra-long-life synthetic technologies capable of up to four times standard life¹, through to cost effective, reliable products for less demanding applications.



IMPROVED CLEANLINESS

All Shell Tellus® products meet the demanding cleanliness requirements of the DIN industry standard to help provide extra protection, improved filter performance and less maintenance.

SYSTEM EFFICIENCY

To help your equipment perform to its design standards, the hydraulic fluid needs to protect, lubricate and help transmit power in the most effective way possible. Shell Tellus® hydraulic fluids can help maintain or even improve the efficiency of hydraulic systems. From Shell Tellus® S4 ME, which can help improve the energy efficiency of many hydraulic systems, to Shell Tellus® S2 MX and Shell Tellus® S2 VX that provide reliable air release, water separation, filterability, cleanliness and stick-slip performance, there is a choice that can help to optimise your system's efficiency and costs of operation.

REAL-WORLD VALUE DELIVERY

Shell does not just design fluids for the individual components of a hydraulic system such as the pump, we look at the system more broadly. For instance, Shell Tellus® S4 ME has been designed to benefit the complete system. The result is a fluid that:

- can help improve the energy efficiency of the system in which it is used
- can help to increase oil life by up to four times compared with conventional oils in the Shell range²
- can help to prolong equipment life through excellent hydraulic pump wear protection

SHELL TELLUS® S4 ME – for the longest oil life in the Shell range




¹Compared with other oils in the Shell range

²The actual savings depend on the application, the current oil, the maintenance procedures, the equipment condition, the operating conditions and the intensity of hydraulic power usage.

A RANGE OF HYDRAULIC FLUIDS TO MEET YOUR NEEDS

Shell has designed a portfolio of fluids that enables you to choose a product to match your needs.

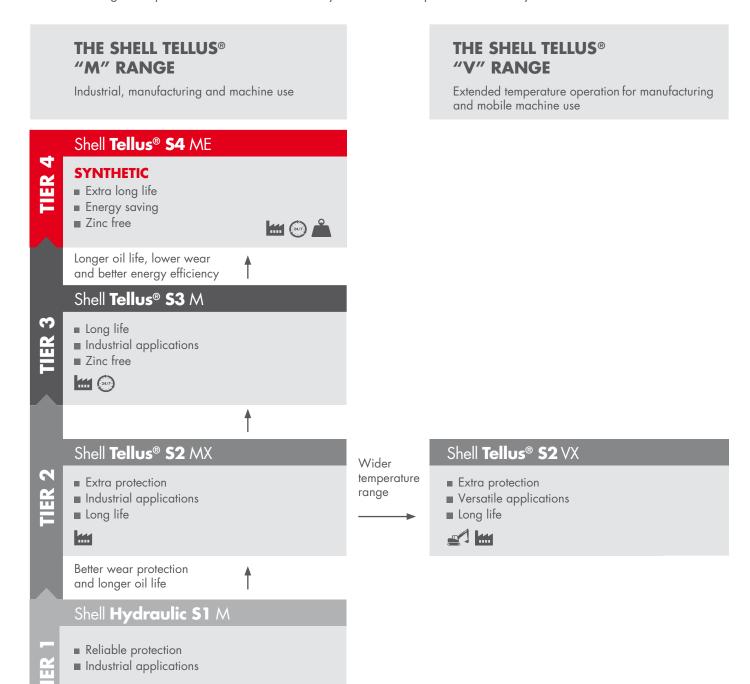

APPLICATION ICON KEY

Factory/machine applications



444

High load



Ultra-low temperature



Mobile equipment/exterior use



Wet conditions

PRODUCT-NAME SUFFIX KEY

A = Water tolerant

E = Energy saving, high efficiency

M = Manufacturing/machine: factory applications

V = Versatile applications

X = Extra/extreme performance

PRODUCT	BENEFITS	TECHNOLOGY	ISO VISCOSITY GRADES	SPECIFICATIONS AND APPROVALS Approvals and claims will vary by viscosity grade
Shell Tellus® S4 ME	■ Extra long life ■ Energy saving	Synthetic, ashless	46, 68	Approved by Fives Group, Eaton, Bosch Rexroth and many other equipment manufacturers. Denison approved fluid. Industry standards: ASTM D6158, ISO 11158, DIN 51524-2
Shell Tellus® S3 M	Long life and improved protectionIndustrial applications	Mineral, zinc free	46, 68, 100	Approved by Fives Group, Eaton, Bosch Rexroth and many other equipment manufacturers. Denison approved fluid. Industry standards: ISO 11158, DIN 51524-3, ASTM D6158
Shell Tellus® S2 VX	Extra protectionVersatile applicationLong life	Mineral, zinc-based	HV/15, 22, 32, 46, 68, 100	Approved by Eaton, Fives Group, Bosch Rexroth (RDE 90245) and many other equipment manufacturers. Denison approved fluid. Industry standards: ISO 11158, ASTM D6158 (HV), US Steel 126, DIN 51524-3
Shell Tellus® S2 MX	Extra protectionIndustrial applicationsLong life	Mineral, zinc-based	HM/22, 32, 46, 68, 100	Approved by Bosch Rexroth (RDE 90245), Eaton, Fives Group and many other equipment manufacturers. Denison approved fluid. Industry standards: ISO 11158, ASTM D6158 (HM), US Steel 126, DIN 51524-2
Shell Hydraulic S1 M	■ Reliable protection ■ Industrial applications	Mineral, zinc-based	HM/46, 68	ISO 11158

FULL PRODUCT AND SERVICE PORTFOLIO

Shell Lubricants has been named a global leader in lubricants for 12 years in a row (Kline 2018), and Shell Tellus® hydraulic fluids have offered benefits to users for more than 70 years. Shell is constantly investing to develop better lubrication solutions, including advanced synthetic technologies such as:

- Shell Omala® S4 GXV* synthetic gear oil for long life in demanding applications, Siemens MD approved.
- Shell Corena® S4 R air compressor oil for up to 12,000 hours of protection.

In addition, Shell provides the Shell LubeAnalystTM oil condition monitoring service, which as part of a preventative maintenance program can help maximise your equipment and lubricant performance.

Whatever your needs or application, Shell can provide a full range of oils and greases, including synthetic, high-performance products and additional services.



GOT QUESTIONS?

To learn more or ask any questions about Shell Tellus, simply contact the Viva Energy Technical Helpdesk on:

Email: technicalhelpdesk@vivaenergy.com.au

Telephone: 1300 134 205 (Monday to Friday, 9am to 6pm AEST)

To find your local stockist, visit

LubeLocator at shell.com.au/lubelocator







Shell Lubricants Macro Distributor

Shell trademarks used under licence

Release Date: March 2019